




KENOSHA PORTABLE SPA

STAINLESS STEEL INGROUND WITH AUTOCOVER

SPECIFICATIONS

SPEC SHEET FOR PRE-PLANNING
& ESTIMATING ONLY

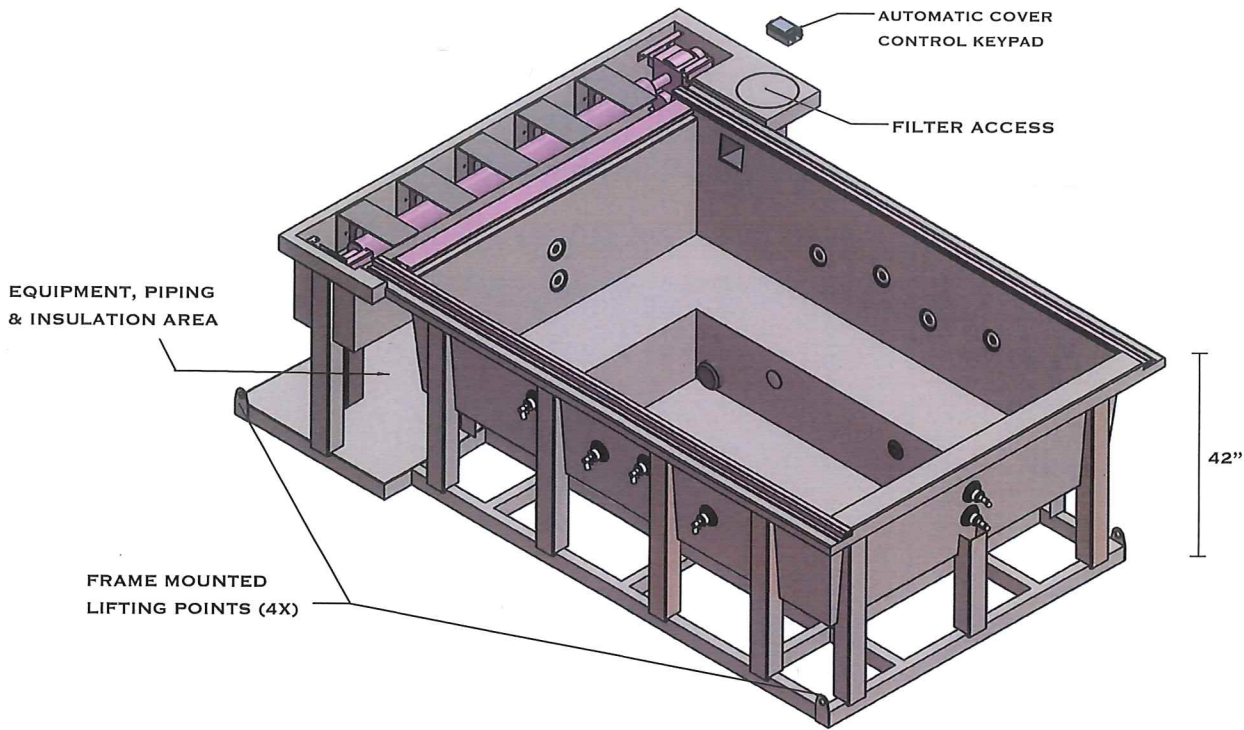

FEATURES:


- + 316L STAINLESS STEEL SPA SHELL WITH 304L STAINLESS STEEL FRAME
- + 6-8 BATHER CAPACITY
- + LED LIGHTING
- + 12 HYDROTHERAPY JETS
- + FULLY INSULATED WITH 2-PART POLYURETHANE FOAM (NOT SHOWN)
- + RIGID FOAM COVER WITH R-15 INSULATION AND ASTM CERTIFICATION
- + UV LIGHT & HYDROGEN PEROXIDE SANITIZATION
- + OVERALL DIMENSIONS: 136" x 92" x 42"
- + WATER CAPACITY: 607 GALLONS
- + EMPTY WEIGHT: 1,807 LBS
- + FULL WEIGHT: 6,875 LBS

CERTIFICATIONS:

- STAINLESS STEEL & COPPER SHELLS:
- + IAPMOEGS LISTING FOR UL 1795 AND CSA C22.2 STANDARDS

POWER REQUIREMENTS:

- + (1X) 230V 40A GFCI SERVICE AT EQUIPMENT FOR SPA CONTROL
- + (1X) 230V 60A GFCI SERVICE AT EQUIPMENT FOR 11 KW ELECTRIC HEATER
- + (1X) 120V 15A GFCI SERVICE AT AUTOCOVER KEYPAD
- + SPA SHELL AND ALL EQUIPMENT TO BE BONDED W/ MIN. #6AWG BARE COPPER CONDUCTOR

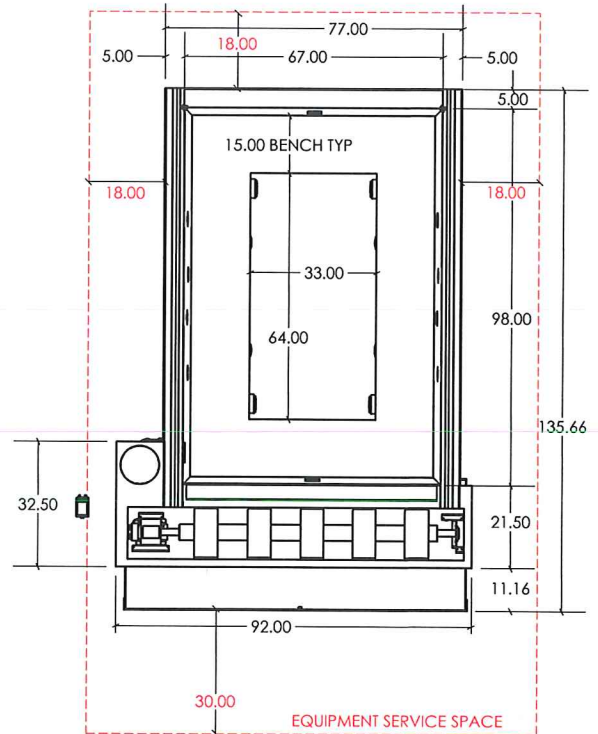




KENOSHA PORTABLE SPA

COPPER INGROUND WITH AUTOCOVER

SPECIFICATIONS

SPEC SHEET FOR PRE-PLANNING
& ESTIMATING ONLY

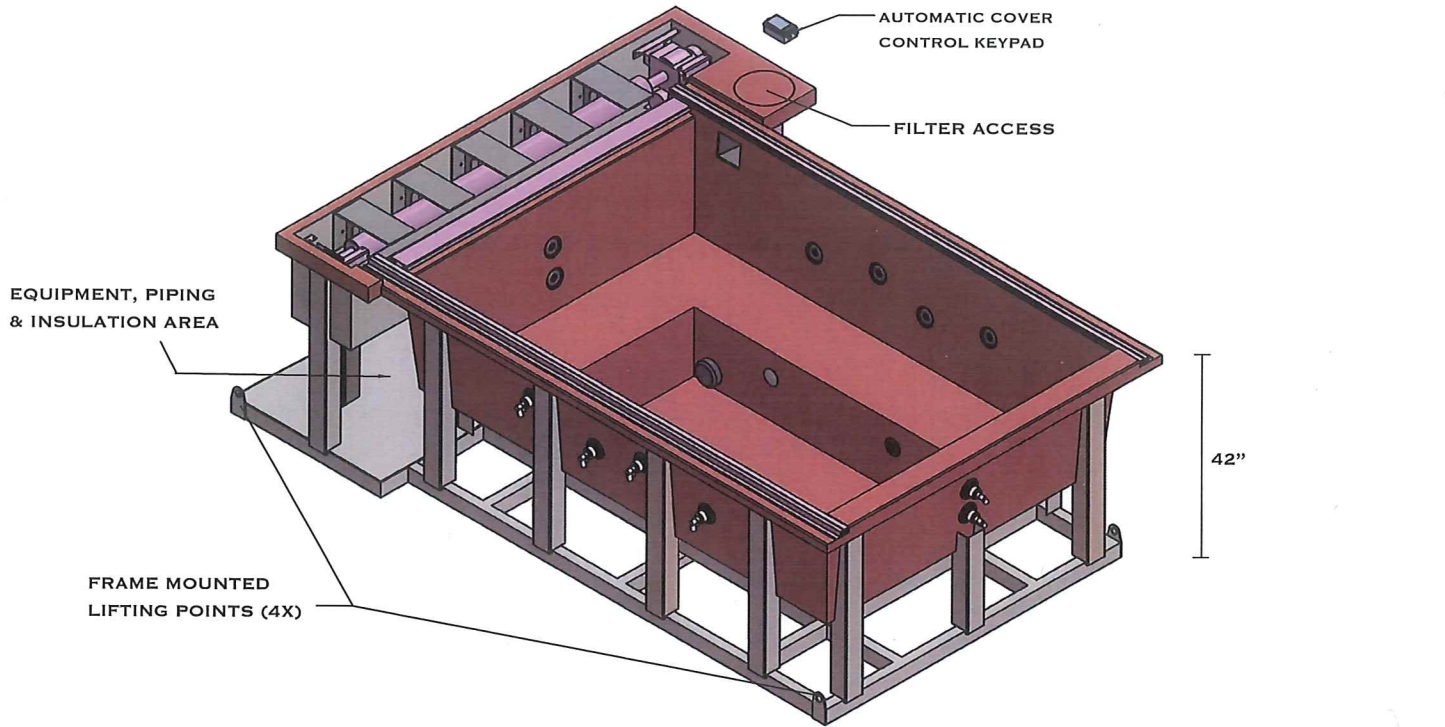

FEATURES:

- + COPPER SPA SHELL WITH 304L STAINLESS STEEL FRAME
- + 6-8 BATHER CAPACITY
- + LED LIGHTING
- + 12 HYDROTHERAPY JETS
- + FULLY INSULATED WITH 2-PART POLYURETHANE FOAM (NOT SHOWN)
- + RIGID FOAM COVER WITH R-15 INSULATION AND ASTM CERTIFICATION
- + UV LIGHT & HYDROGEN PEROXIDE SANITIZATION
- + OVERALL DIMENSIONS: 136" X 92" X 42"
- + WATER CAPACITY: 607 GALLONS
- + EMPTY WEIGHT: 1,8.5 LBS
- + FULL WEIGHT: 6,905 LBS

CERTIFICATIONS:

- STAINLESS STEEL & COPPER SHELLS:
- + IAPMOEGS LISTING FOR UL 1795 AND CSA C22.2 STANDARDS

POWER REQUIREMENTS:

- + (1X) 230V 40A GFCI SERVICE AT EQUIPMENT FOR SPA CONTROL
- + (1X) 230V 60A GFCI SERVICE AT EQUIPMENT FOR 11 KW ELECTRIC HEATER
- + (1X) 120V 15A GFCI SERVICE AT AUTOCOVER KEYPAD
- + SPA SHELL AND ALL EQUIPMENT TO BE BONDED W/ MIN. #6AWG BARE COPPER CONDUCTOR

